

CONSTRUCTION FATALITY NARRATIVE



Foreman Falls 17 Feet from Leading Edge of Roof Deck

INCIDENT FACTS

REPORT #: 71-244-2023s

REPORT DATE: August 28, 2023

INCIDENT DATE: May 31, 2022


WORKER: 59 years old

INDUSTRY: Property Managers / Building Construction

OCCUPATION: Construction Foreman

SCENE: Commercial construction site

EVENT TYPE: Fall from leading edge

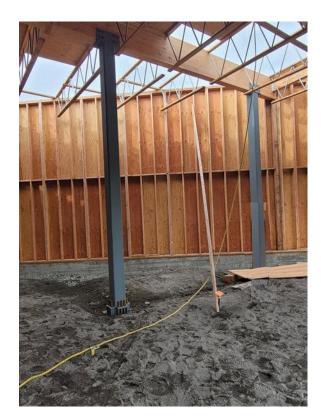









A 59-year-old construction foreman died after falling from the leading edge of a roof deck. He worked for his employer, a residential and commercial property management company, for eight months. His duties included leading work crews, basic carpentry, framing, sheeting, and siding.









The foreman had been at the construction site of a new single-story commercial building for almost a month. On the incident day, he was alone on top of the building constructing a plywood roof deck. He was using a personal fall arrest system (PFAS), including anchorage, lifeline, rope grab, body harness, and shock-absorbing lanyard. A framing helper was assisting from the ground by using a scissor lift to hand him tools and materials.









The foreman was laying plywood sheets onto trusses that had brackets on each receiving end where the sheets would be set. He was using his heel to kick the sheets into the brackets. When he tried moving a sheet with his feet, it gave way and dropped under his weight. He fell 17 feet to the ground inside the building with the sheet landing beside him.









The helper was outside the building and did not see the fall. A manager watching live-streamed job site surveillance video in the office saw the worker on the ground, had the helper check him, and called 911. He died at the hospital after six days on life-support.









Following the incident, investigators found:

• The worker's PFAS was in excess of 50 feet for a 17-foot fall. An unnecessary second shock-absorbing lanyard was connected to the anchorage. His chest strap was not connected and the leg straps were loose. If the worker had the correct fall distance needed for his PFAS to engage and arrest his fall, it is likely his body still would have slipped out of the harness.









- The employer did not provide adequate fall protection training, specifically:
 - How to evaluate the fall clearance needed in order to select, install and use an appropriate PFAS.
 - How to engage all connectors to ensure the worker fully secured in the harness during a fall.











Photo 1. Lifeline with rope grab stretched to show length from where worker fell (X) near plywood sheet.











Photo 2. Wider view of building interior where worker landed after falling from leading edge of roof deck above. Arrow shows direction of fall.











Photo 3. Fall protection anchor, shock-absorbing lanyard, and lifeline near roof deck leading edge where worker fell.









Requirements

Employers must:

 Develop fall protection policies in their written Accident Prevention Program (APP) that meet the requirements of the Unified Safety Standards for Fall Protection. See WAC 296-880









Requirements

 Ensure that a fall arrest system, fall restraint system, or positioning device system is provided, installed, and implemented in accordance with <u>WAC 296-880-400 Fall</u> <u>protection system specifications</u> when employees are exposed to fall hazards of six feet or more to the ground or lower level while constructing a leading edge. See <u>WAC 296-880-30005(1)(b)</u>









Requirements

- Ensure a competent person trains each affected employee to know at least the following::
 - (a) The nature of fall hazards in the work area; (b) When fall protection is required; (c) What fall protection is required; (d) The correct procedures for erecting, maintaining, assembling, disassembling, and inspecting the fall protection systems to be used; (e) The use and operation of fall protection systems used; (f) Limitations of fall protection systems used; (g) Proper care, maintenance, useful life, removal from service; and (h) The requirements of this chapter. See WAC 286-880-10015(2)

Safety & Health Assessment & Research for Prevention







Recommendations

FACE investigators concluded that to help prevent similar occurrences employers should:

- Discuss fall protection policies at crew meetings, monthly safety meetings, and annual stand-downs.
- Provide recurring hands-on fall protection training and evaluations of workers' ability to use it correctly.









Resources

Fall Protection Fundamentals online training course

Spanish version

Oregon OSHA Public Education









This narrative was developed to alert employers and workers of a tragic incident in Washington State and is based on preliminary data ONLY and does not represent final determinations regarding the nature of the incident or conclusions regarding the cause of the injury.

Developed by the Washington State Fatality Assessment and Control Evaluation (WA FACE) Program and the Division of Occupational Safety and Health (DOSH), Washington State Dept. of Labor & Industries. WA FACE is supported in part by a grant from the National Institute for Occupational Safety and Health (NIOSH grant# 5U60OH008487). For more information visit www.lni.wa.gov/safety-health/safety-research/ongoing-projects/work-related-fatalities-face.

Safety & Health Assessment & Research for Prevention

